


This PDF File is prepared by Motion Wave, Inc. (www.mwsbike.com)

**MODEL
HJC-2002**

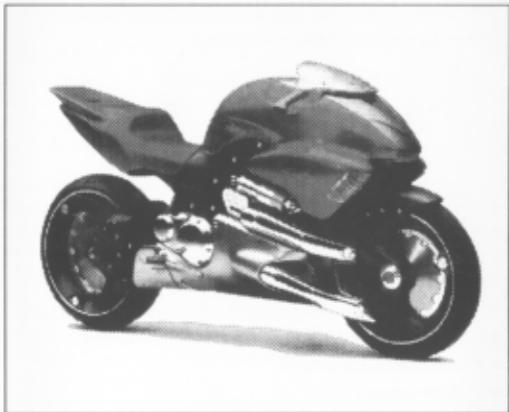

**REMOTE CONTROLLED
MOTOR CYCLE
ALARM SYSTEM**

INTRODUCTION

CONGRATULATIONS on your purchase of the model HJC-2002, motorcycle alarm system. Please read the entire user's guide before installing.

MODEL HJC-2002 FEATURES

- Dual button remote control
- Remote arming / disarming / panic.
- Self learning remote code.
- Self contained unit with 110db siren.
- Adjustable electromagnetic shock sensor.
- Vehicle tamper notification.
- 5 second arming delay.
- Vehicle locator.
- Low current draw.
- Ignition kill.


INSTALLATION

- Connect the 2 yellow wires to the turn signal lamps.
- The white wire is the alarm's antenna. Do not cut or connect any other wire to the white wire.
- Connect the 2 blue wires according to the diagram.
- Connect the blue wire to the starter motor relay ground.
- Connect the red wire to the positive on the battery.
- Connect the black wire to the negative on the battery.

After the positive and negative wires are attached to the battery you will hear a single beep notifying you that the unit is wired correctly. Please press any button on the remote control for 3 seconds to activate your system. (The HJC-2002 unit is activated by a self learning code). You will hear 2 beeps to notify you that the system is ready.

If you every need to disconnect the fuse please wait 5 seconds before reconnecting. This allows the unit to reset itself. Then follow the previous steps on activating the unit. Install the unit away from the natural elements: heat, water, etc.

This PDF File is prepared by Motion Wave, Inc. (www.mwsbike.com)

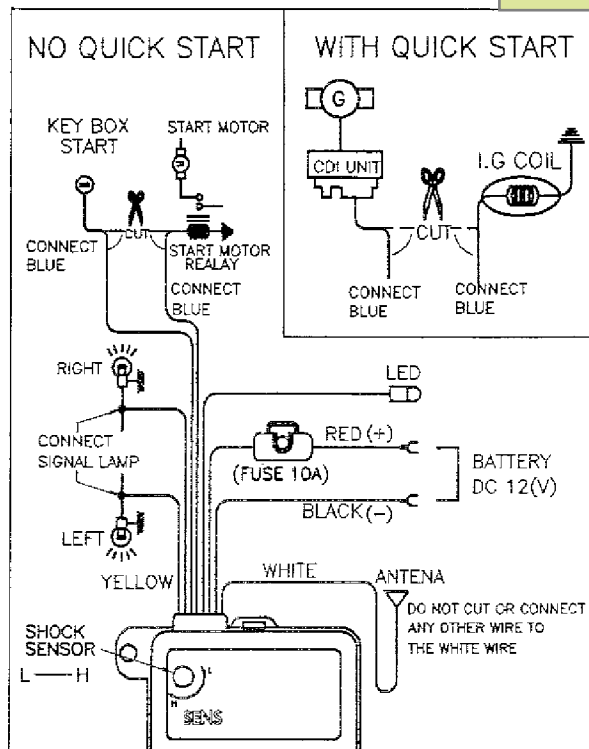

Arming

Press the first(•) button once to arm the system. You will hear one beep and the turn signals will flash once. The system will arm in 5 seconds.

Disarming

Press the first(•) button. You will hear two beeps and the turn signals will flash twice. If your motorcycle has been tampered with you will hear three beeps and the turn signals will flash three times.

Ignition Kill Mode

When the alarm is armed, the ignition kill mode will be engaged and prevent the engine from being started. The ignition kill mode will disengage when the alarm is turned off.

Panic Switch Mode

Press the first button(•) for 3 seconds to activate your emergency siren with the tum signal lights. To deactivate press the first button(•)

Vehiclelocator(Flashing Tum Signals)

Press the second(••)button for more than half seconds to activate the tum signal lights. Your turn signal lights will continue to flash to deactivate press the second(••) button.

SHOCK SENSOR / TROUBLE SHOOTING

This PDF File is prepared by Motion Wave, Inc. □
(www.mwsbike.com)

Adjusting Shock Sensor

The shock sensor has already been present at the factory. If You want to increase or decrease the sensitivity, turn the Screw located on the top of the unit under the rubber cap, (The rubber cap must be replaced after adjusting the sensitivity).

TROUBLE SHOOTING

If you have any problems, please check the following:

- Check the battery in the remote control unit.
 - Check all the necessary fuses.
 - Check all the connections of the alarm.
 - Check the remote control for dampness.
- (Disassemble the remote control and dry the unit out)

For any questions, Manufacturer contact phone:

Tel: 562/407-2188

Fax: 562/802-3151

WARRANTY

CHATTERBOX ALARM MODEL HJC-2002 LIMITED WARRANTY

Vigor Sports, Inc. warrants that each new alarm will be free from defective materials and workmanship for a period of one (1) year from the date of original purchase. Vigor Sports, Inc. will remedy any such defect by repair or replacement (at our option) of the unit, provided the unit is delivered to the address listed below, intact, for our examination, with all transportation charges prepaid and accompanied by a copy of the original retail sales receipt. The provisions of this warranty shall not apply to any unit which has been subject to misuse, neglect, incorrect installation, unauthorized modification, accident or has been repaired or altered outside of our factory.

The express warranty contained herein is in lieu of all other warranties, express or implied or statutory, including without limitation any warranty of merchantability or fitness for a particular use. In no event will Vigor Sports, Inc. be liable to the buyer for any damages, including special, incidental, indirect or consequential damages.

For warranty service contact:

Vigor Sports, Inc.
16818 Marquardt Ave.
Cerritos, Ca 90703.

Tel: (562)407-2188 Fax: (562)802-3151